

CABINETS & RACKS



WALL MOUNT CABINETS (SINGLE SECTION) **82**

WALL MOUNT CABINETS (DOUBLE SECTION) **83**

LOW-PROFILE WALL MOUNT CABINETS (DOUBLE SECTION) **84**

2 POST & 4 POST OPEN RACKS **84 - 85**

ECONOMY SERVER RACKS **86 - 87**

FLOOR STANDING NETWORKING CABINETS **88**

CABINETS ACCESSORIES & CABLE MANAGERMENTS **89 - 90**

➤ Wall Mount Cabinets (Single Section)

Feature:

- Welded frame, reliable structure
- Standing or wall mounting installation
- Easy mounting installation
- 19" standard installation
- Removable side panels with locks
- Cable entry on both of top cover and bottom panel
- Turning angle of front door is over 180 degrees
- Loading Capacity: 60 Kgs
- Degree of Protection: IP20
- 120mm fan optional

Standard :


- Comply with ANSI/EIA, RS-310-D, DIN41497 part 1, EC297-2, DIN41494 part 7, GB/T3047.2-92 standard

Material:


- SPCC cold Rolled Steel
- Thickness : Mounting profile : 1.5mm, others : 1.2mm

Surface Finish:

- Degreasing, pickling, phosphoric, powder coated

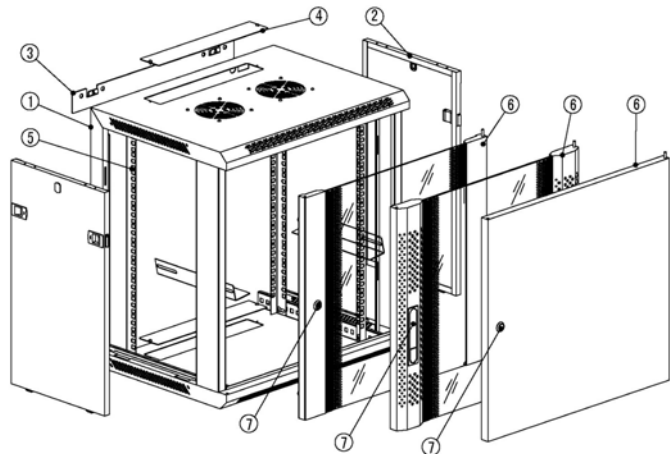

- 1- Frame
- 2- Side panel
- 3- Mounting panel
- 4- Cable entry cover
- 5- Mounting profile
- 6- Front door options
- 7- Lock

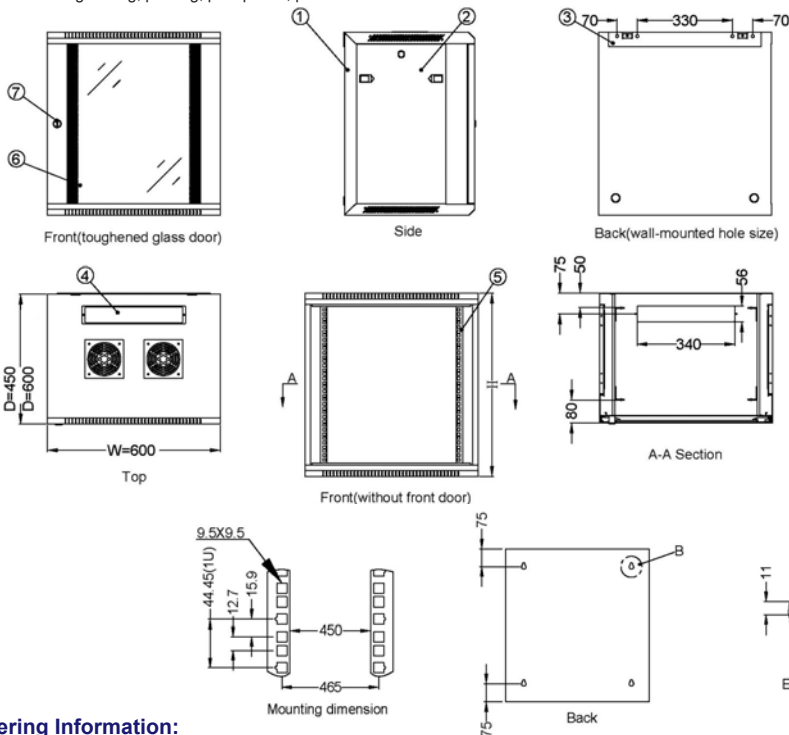

Ordering Information:

Single Section

Single Section					
P/N	Capacity(U)	Color	Height(mm)	Width(mm)	Depth(mm)
NB-CAB-001	6	Black (RAL9004)	368	600	450
NB-CAB-002		Gray (RAL7035)			
NB-CAB-003	9	Black (RAL9004)	501		
NB-CAB-004		Gray (RAL7035)			
NB-CAB-005	12	Black (RAL9004)	635		
NB-CAB-006		Gray (RAL7035)			
NB-CAB-007	15	Black (RAL9004)	769		
NB-CAB-008		Gray (RAL7035)			
NB-CAB-009	18	Black (RAL9004)	901		
NB-CAB-010		Gray (RAL7035)			
NB-CAB-137	22	Black (RAL9004)	1082		
NB-CAB-138		Gray (RAL7035)			
NB-CAB-106	6	Black (RAL9004)	368	600	600
NB-CAB-107	9	Black (RAL9004)	501		
NB-CAB-108	12	Black (RAL9004)	635		
NB-CAB-109	15	Black (RAL9004)	769		
NB-CAB-110	18	Black (RAL9004)	901		
NB-CAB-139	22	Black (RAL9004)	1082		

➤ Wall Mount Cabinets (Double Section)

Feature:

- Welded frame, reliable structure
- Standing or wall mounting installation
- Easy mounting installation
- 19" standard installation
- Removable side panels with locks
- Cable entry on both of top cover and bottom panel
- Turning angle of front door is over 180 degrees
- Loading Capacity: 60 Kgs
- Degree of Protection: IP20
- Easy operation and maintaining at the back
- 120mm fan optional
- Turning angle of rear door is above 90 degrees

Standard :


- Comply with ANSI/EIA, RS-310-D, DIN41497 part 1, EC297-2, DIN41494 part 7, GB/T3047.2-92 standard

Material:


- SPCC cold Rolled Steel
- Thickness : Mounting profile : 1.5mm, others : 1.2mm

Surface Finish:

- Degreasing, pickling, phosphoric, powder coated

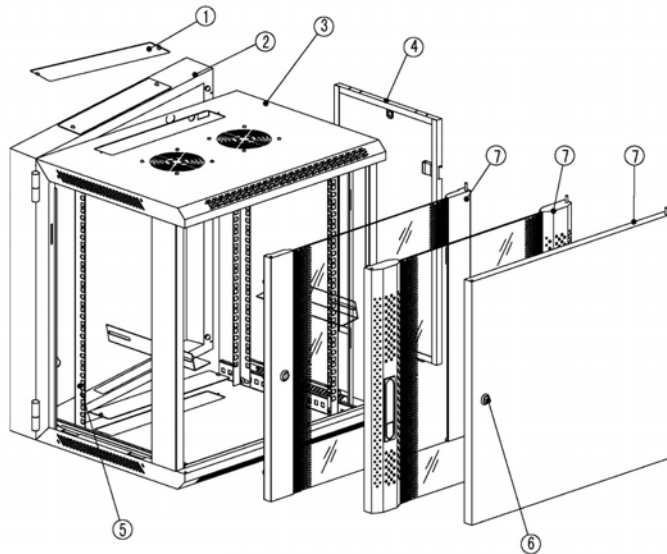

1. Cable entry cover
2. Back panel
3. Frame
4. Side panel
5. Mounting profile
6. Lock
7. Front door options

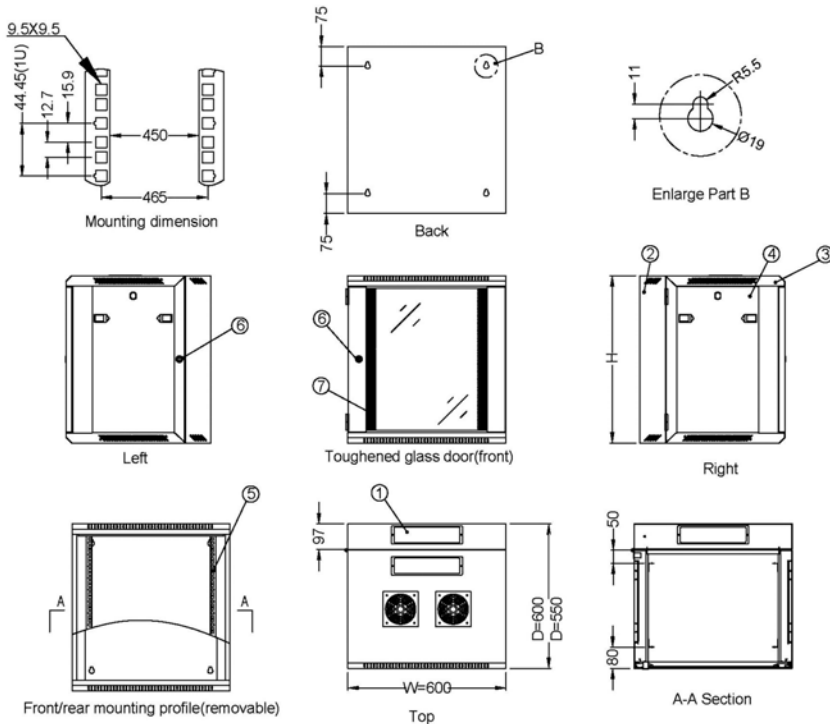

Ordering Information:

Double Section					
P/N	Capacity(U)	Color	Height(mm)	Width(mm)	Depth(mm)
NB-CAB-095	12	Black (RAL9004)	635	600	550
NB-CAB-012		Gray (RAL7035)			
NB-CAB-096	15	Black (RAL9004)	769	600	600
NB-CAB-014		Gray (RAL7035)			
NB-CAB-087	6	Black (RAL9004)	368	600	600
NB-CAB-060	9	Black (RAL9004)	501		
NB-CAB-011	12	Black (RAL9004)	635		
NB-CAB-013	15	Black (RAL9004)	769		
NB-CAB-089	18	Black (RAL9004)	901		
NB-CAB-141	22	Black (RAL9004)	1082		

➤ Low-Profile Wallmount Cabinet (Double Section)



Features:

- Max. Capacity : 13U
- Static loading capacity : 50 Kgs.
- Two Height available: (501mm & 769mm)
- External dimension of cabinet: 600mm (width)*270mm(depth)
- Toughened glass front door, could observe devices' operation
- Cable entries are available at top cover, good ventilation (cooling fans are optional)
- 2 pieces of mounting profiles are available. From the bottom up, install 2U mounting horizontally from the 1st U; install 4U mounting profiles horizontally from the 6th U. The installation position for 4U mounting profiles could be adjusted from the 6th U to the 9th U.
- Cable entries at the back of wall mounted enclosure are available. Metal cable management rings are installed at the back for cable management.
- Easy operation and maintaining at the back of enclosure.

Ordering Information:






P/N	Color	W*D*H (mm)	Max. capacity
NB-CAB-070	Black (RAL9004)	600*270*769	13U
NB-CAB-071	Gray (RAL7035)	600*270*769	13U
NB-CAB-072	Black (RAL9004)	600*270*501	8U
NB-CAB-073	Gray (RAL7035)	600*270*501	8U

➤ Open Racks

Features:

- Standard: comply with ANSI/EIA; RS-310-D, IEC297-2, DIN41491, PART1, DIN41494 PART7, GB/T3047.2-92 standard.
- Modular design, easily assemble and disassemble for delivery, low-cost.
- Various optional accessories according to requirements (cable management slot, cable management, removable working panel, etc.)
- 19" frame 2mm welded fold steel sheet, two side figure punching.
- **COLOR:** Black (RAL9004)


Two post 42U (Space saver)

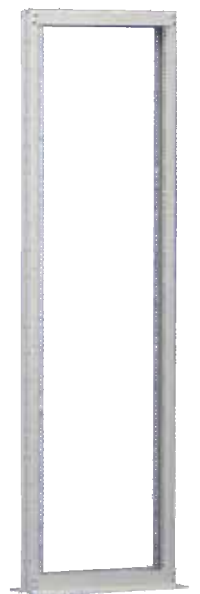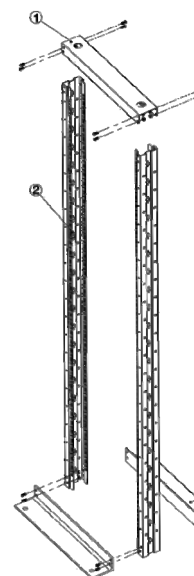


1. Horizontal beam 2. Pole 3. Plinth

➤ Open Racks

Four post 42U

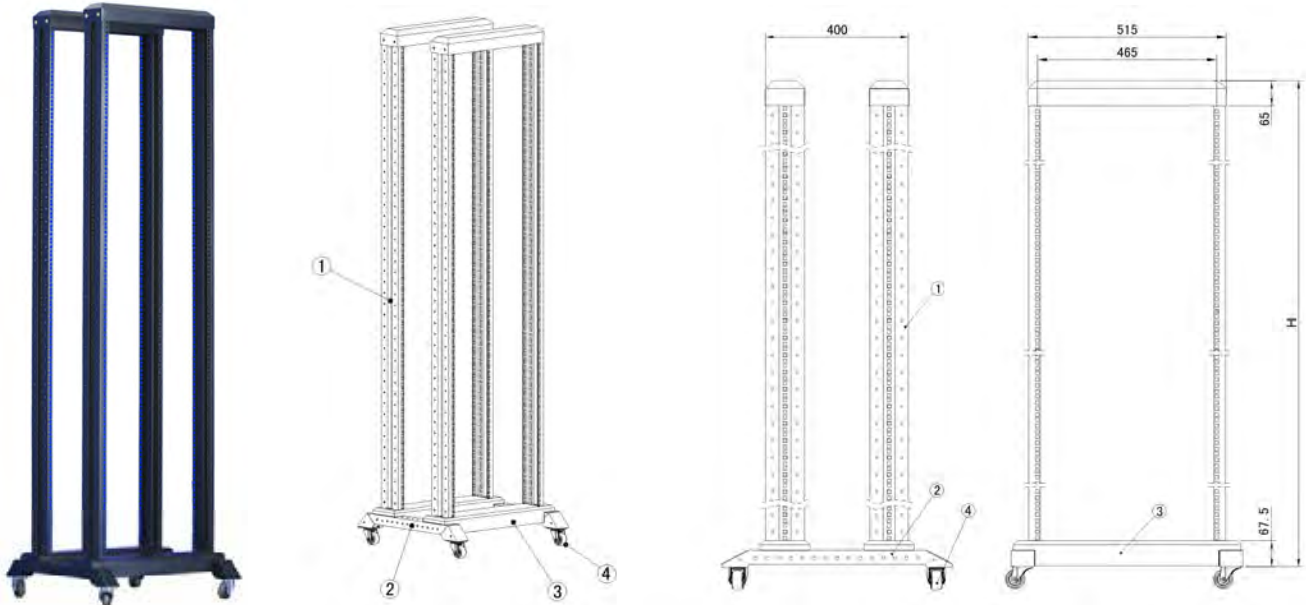

Two post 42U

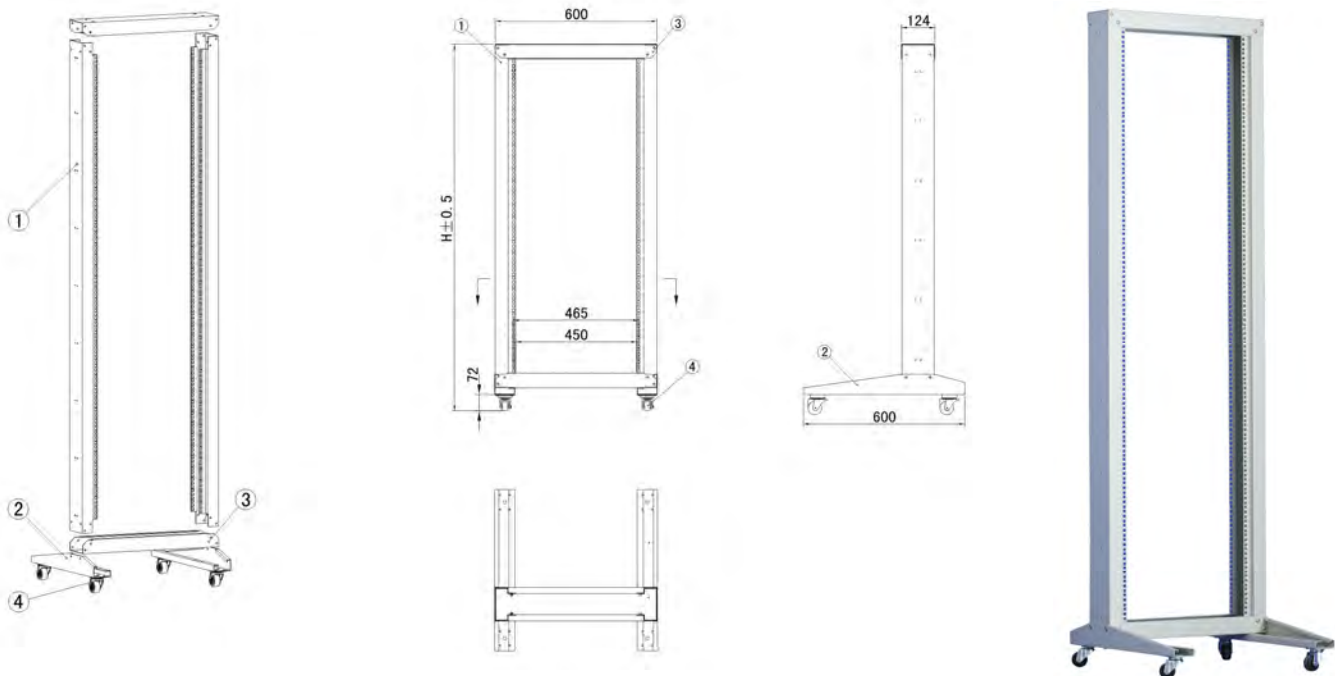

1-Pole 2- Plinth 3- Horizontal beam 4- Heavy duty castor

Ordering Information:

Capacity	Color	Static Loading	P/N
Two post 42U	Black (RAL9004)	150KG	NB-CAB-078
Four post 42U	Black (RAL9004)	150KG	NB-CAB-094
Two post 42U (Space saver)	Black (RAL9004)	200KG	NB-CAB-133
Cable Management Slot for open Rack, 42U	Black (RAL9004)		NB-CAB-128

➤ Economy Floor Standing Server Racks with Front Metal Door

Feature:

- Comply with ANSI/EIA;RS-310-D; DIN41491; PART1; IEC297-2; DIN41494; PART7; GB/T3047.2-92 standard, compatible 19" international standard, metric system standard and ETSI standard;
- Optional cable entry on top cover and bottom panel, removable front & rear door and side panel facility, ventilation and rat-proof on the bottom.
- Reliable structure, static loading capacity: 800KG
- Adjustable feet and castors are available, moving conveniently, and fixing reliable
- Hexagonal reticular high-density vented front door, Double section high-density vented rear door.
- Varies optional accessories, reliable quality.
- Excellent ventilation and heat dispersing .
- **Surface Finish:** degreasing, pickling, phosphoric, powder coated.
- **Material:** SPCC cold rolled steel
- **Thickness:** mounting profile 2.0mm, others: 1.2-1.5mm
- **Degree of Protection:** IP20
- **Color:** RAL9004 (Black) ; RAL7035 (Gray)



Double-section high-density vented rear door




Fan unit



Spring lock, High density vented door



Adjustable mounting profile & mounting angle



U mark mounting rail



Lockable cable entry



Earthing



800mm Width cabinet comes with 2 metal cable management slot with cap



Front Metal Curved Vented door

Ordering Information:

Part Number	Description	Color	Width	Depth	High	Part Number	Description	Color	Width	Depth	High
NB-CAB-147	22U Cabinet	Black (RAL9004)	600mm	600mm	1166mm	NB-CAB-156	42U Cabinet	Black (RAL9004)	600mm	600mm	2055mm
NB-CAB-148	22U Cabinet	Black (RAL9004)	600mm	800mm	1166mm	NB-CAB-157	42U Cabinet	Black (RAL9004)	600mm	800mm	2055mm
NB-CAB-149	22U Cabinet	Black (RAL9004)	600mm	1000mm	1166mm	NB-CAB-103	42U Cabinet	Black (RAL9004)	600mm	1000mm	2055mm
NB-CAB-150	22U Cabinet	Black (RAL9004)	800mm	800mm	1166mm	NB-CAB-104	42U Cabinet	Black (RAL9004)	800mm	800mm	2055mm
NB-CAB-151	22U Cabinet	Black (RAL9004)	800mm	1000mm	1166mm	NB-CAB-105	42U Cabinet	Black (RAL9004)	800mm	1000mm	2055mm
NB-CAB-152	27U Cabinet	Black (RAL9004)	600mm	600mm	1388mm	NB-CAB-158	47U Cabinet	Black (RAL9004)	600mm	600mm	2277mm
NB-CAB-153	27U Cabinet	Black (RAL9004)	600mm	800mm	1388mm	NB-CAB-159	47U Cabinet	Black (RAL9004)	600mm	800mm	2277mm
NB-CAB-102	27U Cabinet	Black (RAL9004)	600mm	1000mm	1388mm	NB-CAB-160	47U Cabinet	Black (RAL9004)	600mm	1000mm	2277mm
NB-CAB-154	27U Cabinet	Black (RAL9004)	800mm	800mm	1388mm	NB-CAB-161	47U Cabinet	Black (RAL9004)	800mm	800mm	2277mm
NB-CAB-155	27U Cabinet	Black (RAL9004)	800mm	1000mm	1388mm	NB-CAB-162	47U Cabinet	Black (RAL9004)	800mm	1000mm	2277mm

➤ Economy Floor Standing Server Racks with Front Glass Door

Feature:

- Comply with ANSI/EIA;RS-310-D; DIN41491; PART1; IEC297-2; DIN41494; PART7; GB/T3047.2-92 standard, compatible 19" international standard, metric system standard and ETSI standard;
- Optional cable entry on top cover and bottom panel, removable front & rear door and side panel facility, ventilation and rat-proof on the bottom.
- Reliable structure, static loading capacity: 800KG
- Adjustable feet and castors are available, moving conveniently, and fixing reliable
- Tempered glass front door with vented border, Double section high-density vented rear door.
- Varies optional accessories, reliable quality.
- Excellent ventilation and heat dispersing .
- **Surface Finish:** degreasing, pickling, phosphoric, powder coated.
- **Material:** SPCC cold rolled steel
- **Thickness:** mounting profile 2.0mm, others: 1.2-1.5mm
- **Degree of Protection:** IP20
- **Color:** RAL9004 (Black) ; RAL7035 (Gray)




Double-section high-density vented rear door




Fan unit



Vented border



Adjustable mounting profile & mounting angle



U mark mounting rail



Lockable cable entry



Earthing



800mm Width cabinet comes with 2 metal cable management slot with cap



Tempered glass front door with vented border

Ordering Information:

Part Number	Description	Color	Width	Depth	High	Part Number	Description	Color	Width	Depth	High
NB-CAB-163	22U Cabinet	Black (RAL9004)	600mm	600mm	1166mm	NB-CAB-171	42U Cabinet	Black (RAL9004)	600mm	600mm	2055mm
NB-CAB-164	22U Cabinet	Black (RAL9004)	600mm	800mm	1166mm	NB-CAB-172	42U Cabinet	Black (RAL9004)	600mm	800mm	2055mm
NB-CAB-165	22U Cabinet	Black (RAL9004)	600mm	1000mm	1166mm	NB-CAB-113	42U Cabinet	Black (RAL9004)	600mm	1000mm	2055mm
NB-CAB-166	22U Cabinet	Black (RAL9004)	800mm	800mm	1166mm	NB-CAB-114	42U Cabinet	Black (RAL9004)	800mm	800mm	2055mm
NB-CAB-167	22U Cabinet	Black (RAL9004)	800mm	1000mm	1166mm	NB-CAB-111	42U Cabinet	Black (RAL9004)	800mm	1000mm	2055mm
NB-CAB-168	27U Cabinet	Black (RAL9004)	600mm	600mm	1388mm	NB-CAB-173	47U Cabinet	Black (RAL9004)	600mm	600mm	2277mm
NB-CAB-169	27U Cabinet	Black (RAL9004)	600mm	800mm	1388mm	NB-CAB-174	47U Cabinet	Black (RAL9004)	600mm	800mm	2277mm
NB-CAB-112	27U Cabinet	Black (RAL9004)	600mm	1000mm	1388mm	NB-CAB-175	47U Cabinet	Black (RAL9004)	600mm	1000mm	2277mm
NB-CAB-170	27U Cabinet	Black (RAL9004)	800mm	800mm	1388mm	NB-CAB-176	47U Cabinet	Black (RAL9004)	800mm	800mm	2277mm
NB-CAB-134	27U Cabinet	Black (RAL9004)	800mm	1000mm	1388mm	NB-CAB-177	47U Cabinet	Black (RAL9004)	800mm	1000mm	2277mm

➤ Floor Standing Networking Cabinets

Feature:

- Comply with ANSI/EIA;RS-310-D; DIN41491; PART1; IEC297-2; DIN41494; PART7; GB/T3047.2-92 standard, compatible 19" international standard, metric system standard and ETSI standard;
- Optional cable entry on top cover and bottom panel, removable front & rear door and side panel facility, ventilation and rat-proof on the bottom.
- Reliable structure, static loading capacity: 500KG
- Adjustable feet and castors are available, moving conveniently, and fixing reliable
- International popular tempered glass front door, steel rear door.
- Varies optional accessories, reliable quality.
- Good ventilation and heat dispersing .
- **Surface Finish:** degreasing, pickling, phosphoric, powder coated.
- **Material:** SPCC cold rolled steel,
- **Thickness:** mounting profile 2.0mm, others: 1.2-1.5mm
- **Degree of Protection:** IP20
- **Color:** RAL9004 (Black) ; RAL7035 (Gray)



U mark mounting rail



Adjustable mounting profile & mounting angle



Earthing



Removable front door



Fan unit




Back door view



Lockable cable entry



800mm Width cabinet comes with 2 metal cable management slot with cap

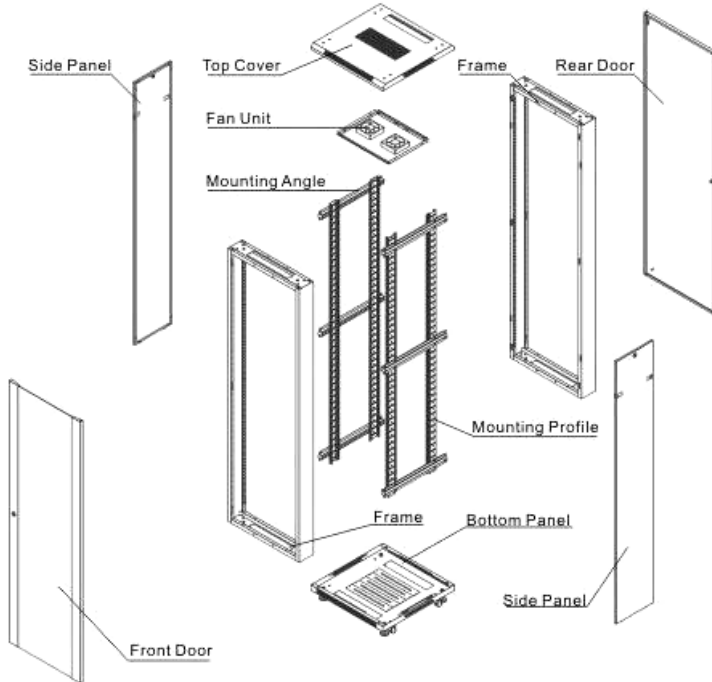


Front door view

Ordering Information:

Part Number	Description	Color	Width	Depth	High	Part Number	Description	Color	Width	Depth	High
NB-CAB-143	18U Cabinet	Black (RAL9004)	600mm	600mm	988mm	NB-CAB-127	27U Cabinet	Gray (RAL7035)	600mm	600mm	1388mm
NB-CAB-144	18U Cabinet	Gray (RAL7035)	600mm	600mm	988mm	NB-CAB-083	27U Cabinet	Black (RAL9004)	600mm	800mm	1388mm
NB-CAB-145	18U Cabinet	Black (RAL9004)	600mm	800mm	988mm	NB-CAB-084	27U Cabinet	Gray (RAL7035)	600mm	800mm	1388mm
NB-CAB-146	18U Cabinet	Gray (RAL7035)	600mm	800mm	988mm	NB-CAB-017	42U Cabinet	Black (RAL9004)	600mm	600mm	2055mm
NB-CAB-124	22U Cabinet	Black (RAL9004)	600mm	600mm	1166mm	NB-CAB-018	42U Cabinet	Gray (RAL7035)	600mm	600mm	2055mm
NB-CAB-125	22U Cabinet	Gray (RAL7035)	600mm	600mm	1166mm	NB-CAB-019	42U Cabinet	Black (RAL9004)	600mm	800mm	2055mm
NB-CAB-015	22U Cabinet	Black (RAL9004)	600mm	800mm	1166mm	NB-CAB-020	42U Cabinet	Gray (RAL7035)	600mm	800mm	2055mm
NB-CAB-016	22U Cabinet	Gray (RAL7035)	600mm	800mm	1166mm	NB-CAB-097	42U Cabinet	Black (RAL9004)	800mm	800mm	2055mm
NB-CAB-126	27U Cabinet	Black (RAL9004)	600mm	600mm	1388mm	NB-CAB-098	42U Cabinet	Black (RAL9004)	800mm	1000mm	2055mm

➤ Heavy-Duty Fixed Shelves


- Rated load: 100 kg
- SPCC cold rolled steel, T: 1.2mm
- Black (RAL9004)



P/N	Color	Dimension WxD (mm)
NB-CAB-129	Black	472 x 350 (for 600-depth cabinet)
NB-CAB-085	Black	472 x 550 (for 800-depth cabinet)
NB-CAB-099	Black	472 x 710 (for 1000-depth cabinet)

➤ Heavy-Duty 19" Rackmount Fixed Shelves with mounting ear


- Rated load: 100 kg
- SPCC cold rolled steel, T: 1.2mm
- Black (RAL9004)



P/N	Color	Dimension WxD (mm)
NB-CAB-100	Black	440 x 550 (for 800-depth cabinet)
NB-CAB-101	Black	440 x 710 (for 1000-depth cabinet)

➤ Cantilever Shelves

- Rated load: 25 kg
- 19" installation
- 2U high
- SPCC cold rolled steel
- Thickness: 1.5mm

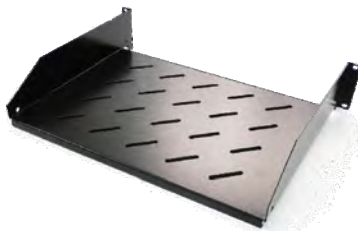

P/N	Color	Dimension WxD (mm)
NB-CAB-057	Black (RAL9004)	440 x 350
NB-CAB-058	Gray (RAL7035)	440 x 350

➤ Keyboard Tray


- 19" Rack Mount
- High grade cold rolled steel
- Adjustable cable arm
- Sloped front edge
- Black (RAL9004)



P/N	Description
NB-CAB-081	Telescopic keyboard tray kit

➤ Fixed Shelves


- Rated load: 60 kg
- SPCC cold rolled steel, T: 1.2mm
- Black (RAL9004)



P/N	Color	Dimension WxD (mm)
NB-CAB-130	Black	472 x 350 (for 600-depth cabinet)
NB-CAB-131	Black	472 x 550 (for 800-depth cabinet)
NB-CAB-132	Black	472 x 730 (for 1000-depth cabinet)

➤ Sliding Shelves

- Rated load: 20 kg
- SPCC cold rolled steel, T: 1.2mm
- Black (RAL9004)

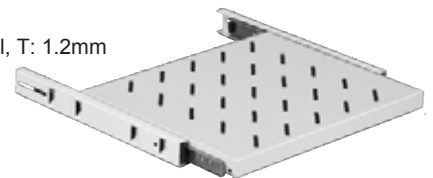

P/N	Color	Dimension WxD1xD2 (mm)
NB-CAB-115	Black	472 x 550 x 580 (for 800-depth cabinet)
NB-CAB-116	Black	472 x 710 x 740 (for 1000-depth cabinet)

➤ Heavy-Duty Vented Fixed Server Shelves

- Rated load: 100 kg
- High grade cold rolled steel



P/N	Color	Depth (mm)
NB-CAB-045	Black	450
NB-CAB-046	White	450
NB-CAB-047	Black	550
NB-CAB-048	White	550
NB-CAB-049	Black	700
NB-CAB-079	White	700

➤ Full Width Fixed & Sliding Shelves

- Rated load: 50 - 75 kg
- High grade cold rolled steel
- Black (RAL9004)



P/N	Description
NB-CAB-053	Full width fixed server shelf 700mm Deep
NB-CAB-054	Full width sliding server shelf 700mm Deep

➤ Blanking Panels

- 19" Rack Mount 1U, 2U & 4U
- SPCC cold rolled steel, 1.2mm
- Powder coated
- Black (RAL9004)



P/N	Description
NB-CAB-091	1U Blanking panel
NB-CAB-092	2U Blanking panel
NB-CAB-093	4U Blanking panel

➤ Cooling Fan

- Dimension: 120mm*120mm*38mm
- Mounting dimension: 105mm*105mm
- Air flowing: 50-110 CBM/H
- Black (RAL9004)



P/N	Description
NB-ACC-012	Single fan 220VAC

➤ 1U Cable Manager, Metal D-Ring

- 19" Rack Mount
- 5 rings
- Carbon steel (1.5mm panel, 2.0mm Metal Buckle)
- Powder coated
- Black (RAL9004)



P/N	Description
NB-ACC-008	1U cable manager, with metal D-rings

➤ Cage Nut Set

- Screw: M6*16
- Nut: M6
- Washer: Φ6
- Plated nickle surface finish



P/N	Description
NB-ACC-013	Cage nuts & screws, (50-pack)

➤ 1U Cable Manager, Metal With Cover


- 19" Rack Mount
- Carbon steel 1.0mm
- Powder coated
- Black (RAL9004)



P/N	Description
NB-ACC-040	1U metal cable manager with cover

➤ 2U Cable Manager, Metal D-Ring

- 19" Rack Mount
- 5 rings
- Carbon steel (1.5mm panel, 2.0mm Metal Buckle)
- Powder coated
- Black (RAL9004)

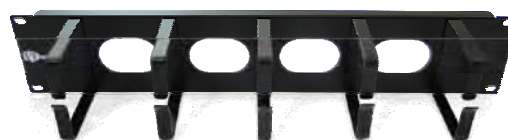

P/N	Description
NB-ACC-010	2U cable manager, with metal D-rings

➤ 1U Cable Manager, Plastic With Cover

- 19" Rack Mount
- High-strength, flame-retardant thermoplastic
- Carbon steel Base 1.0mm
- Powder coated
- Black (RAL9004)



P/N	Description
NB-ACC-009	1U plastic cable manager, with cover

➤ 2U Cable Manager, Plastic With Cover

- 19" Rack Mount
- High-strength, flame-retardant thermoplastic
- Carbon steel Base 1.0mm
- Powder coated
- Black (RAL9004)



P/N	Description
NB-ACC-011	2U plastic cable manager, with cover